
Bushings and Hubs FX keyless bushings

## PHF FX41-60X90



Bushing no.	FX41
d (mm)	60
d (in)	2.36
D (mm)	90
d <sub>w</sub> (mm)	-
L (mm)	-
L <sub>1</sub> (mm)	20
L <sub>2</sub> (mm)	25
L <sub>3</sub> (mm)	33
B (mm)	41
D <sub>1</sub> (mm)	-
d <sub>1</sub> (mm)	-
e (mm)	-
F <sub>t</sub> Transmissible	112
axial force (kN)	3360
M <sub>t</sub> Transmissible torque (Nm)	5500
P <sub>w</sub> Shaft surface	245
pressure (N/mm <sup>2</sup> )	
P <sub>n</sub> Hub surface	165
pressure (N/mm²)	
Clamp screws Qty	8
Clamp screws size	M8

 ® SKF is a registered trademark of the SKF Group
© SKF Group 2012
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

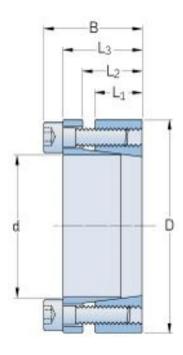

Clamp screws nut	-
M <sub>s</sub> Screw	35
tightening torque	
(Nm)	
Weight (kg)	0.9

 SKF is a registered trademark of the SKF Group
SKF Group 2012
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising the second s out of the use of the information contained herein.

