


PHP 3-3V600TB

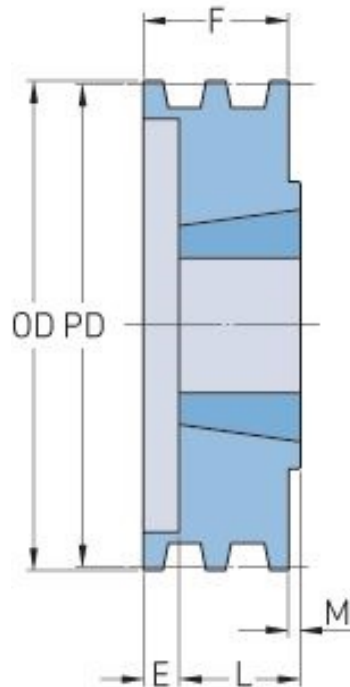

| | |
|-------------------------|---------|
| Diâmetro primitivo (mm) | 151.13 |
| Pitch diameter (in) | 5.95 |
| Diâmetro externo (mm) | 152.4 |
| Outside diameter (in) | 6 |
| Tipo de polie | B-1 |
| Número do casquilho | 2517{1} |
| Furo mínimo (mm) | 19.05 |
| Furo mínimo (in) | 0.75 |
| Furo máximo (mm) | 63.5 |
| Furo mínimo (in) | 2.5 |
| F (in) | 1(1/2) |
| E (in) | (5/32) |
| L (in) | 1(3/4) |
| M (in) | (13/32) |
| Peso (lbs) | 7.4 |

® SKF is a registered trademark of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.