
## **PHS 20B-1TB80**



Pitch P (mm)       31.75         Pitch P (in)       1.25         No. of teeth       80         Pitch diameter (mm)       808.71         Pitch diameter (in)       31.84         Min. bore (mm)       35         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01         Bushing no.       3535		
No. of teeth       80         Pitch diameter (mm)       808.71         Pitch diameter (in)       31.84         Min. bore (mm)       35         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	Pitch P (mm)	31.75
Pitch diameter (mm)       808.71         Pitch diameter (in)       31.84         Min. bore (mm)       35         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       66.23         Weight (lbs)       146.01	Pitch P (in)	1.25
(mm)       31.84         Pitch diameter (in)       31.84         Min. bore (mm)       35         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	No. of teeth	80
Pitch diameter (in)       31.84         Min. bore (mm)       35         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       66.23         Weight (lbs)       146.01	Pitch diameter	808.71
Min. bore (mm)       35         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       66.23         Weight (lbs)       146.01	(mm)	
Min. bore (in)       1.38         Min. bore (in)       1.38         Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	Pitch diameter (in)	31.84
Max. bore (mm)       88.9         Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	Min. bore (mm)	35
Max. bore (in)       3.5         Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       66.23         Weight (lbs)       146.01	Min. bore (in)	1.38
Hub H (mm)       160         Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	Max. bore (mm)	88.9
Hub H (in)       6.3         Hub L (mm)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	Max. bore (in)	3.5
Hub L (mm)       51         Hub L (in)       2.01         Weight (kg)       66.23         Weight (lbs)       146.01	Hub H (mm)	160
Hub L (in)         2.01           Weight (kg)         66.23           Weight (lbs)         146.01	Hub H (in)	6.3
Weight (kg)         66.23           Weight (lbs)         146.01	Hub L (mm)	51
Weight (lbs) 146.01	Hub L (in)	2.01
	Weight (kg)	66.23
Bushing no. 3535	Weight (lbs)	146.01
	Bushing no.	3535

® SKF is a registered trademark of the SKF Group
© SKF Group 2012
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

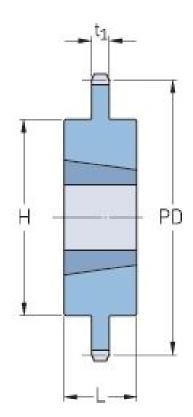