


# PHC 441.100RX5MTR

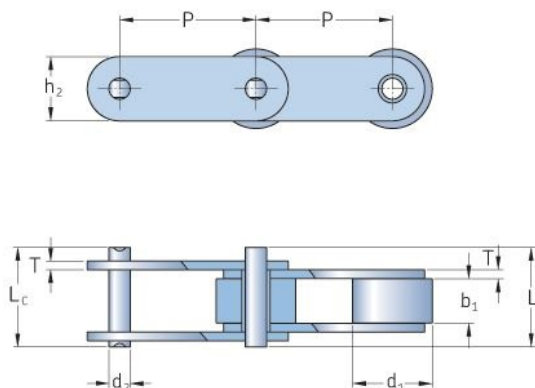

Pitch P (mm)	100
Pitch P (in)	3.94
Roller diameter d1 max (mm)	25.4
Roller diameter d1 max (in)	1
Width between inner plates b1 min (mm)	25.4
Width between inner plates b1 min (in)	1
Pin diameter d2 max (mm)	14.63
Pin length L max (mm)	52
Pin length L max (in)	2.05
Pin length Lc max (mm)	56.4
Pin length Lc max (in)	2.22
Inner plate height h2 max	40
Inner plate height h2 max (in)	1.57
Plate thickness T max (mm)	5
Plate thickness T max (in)	0.2
Ultimate tensile strength Q min kN	100

® SKF is a registered trademark of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

Ultimate tensile strength Q min (lb)	22480.89
Average tensile strength Qo (kN)	114.5
Average tensile strength Qo (lb)	4.51
Weight (kg/m)	5.15
Weight (lbs/ft)	3.46