
Bushings and Hubs FX keyless bushings

## PHF FX140-38X60



Bushing no.	FX140
d (mm)	38
d (in)	1.5
D (mm)	60
d <sub>w</sub> (mm)	-
L (mm)	-
L <sub>1</sub> (mm)	16
L <sub>2</sub> (mm)	19
L <sub>3</sub> (mm)	24
B (mm)	28
D <sub>1</sub> (mm)	-
d <sub>1</sub> (mm)	-
e (mm)	-
F <sub>t</sub> Transmissible axial force (kN)	43.5
M <sub>t</sub> Transmissible torque (Nm)	830
P <sub>w</sub> Shaft surface pressure (N/mm <sup>2</sup> )	160
P <sub>n</sub> Hub surface pressure (N/mm <sup>2</sup> )	120
Clamp screws Qty	11
Clamp screws size	M4

 ® SKF is a registered trademark of the SKF Group
 © SKF Group 2012
 The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

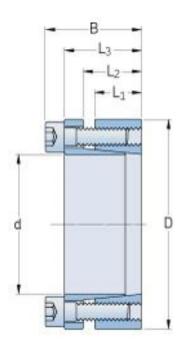

Clamp screws nut	-
M <sub>s</sub> Screw	5
tightening torque	
(Nm)	
Weight (kg)	0.3

® SKF is a registered trademark of the SKF Group
© SKF Group 2012
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising the second secon out of the use of the information contained herein.

